



Established 1906

WT KNOWLES & SONS LIMITED

Fitting Instructions

Push-In 'H' Pot

Code No: KYP59 - KYP60

W T Knowles & Sons Limited

Ash Grove Pipe Works




Elland

West Yorkshire

HX5 9JA

www.wtknowles.co.uk

September 2016: Issue 1

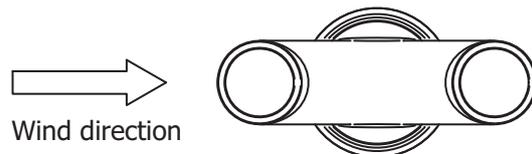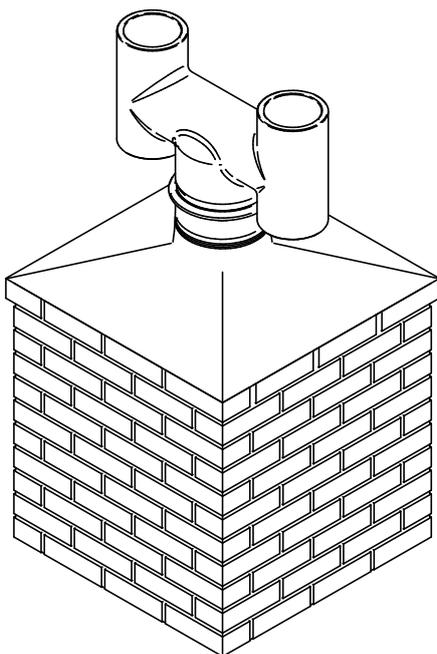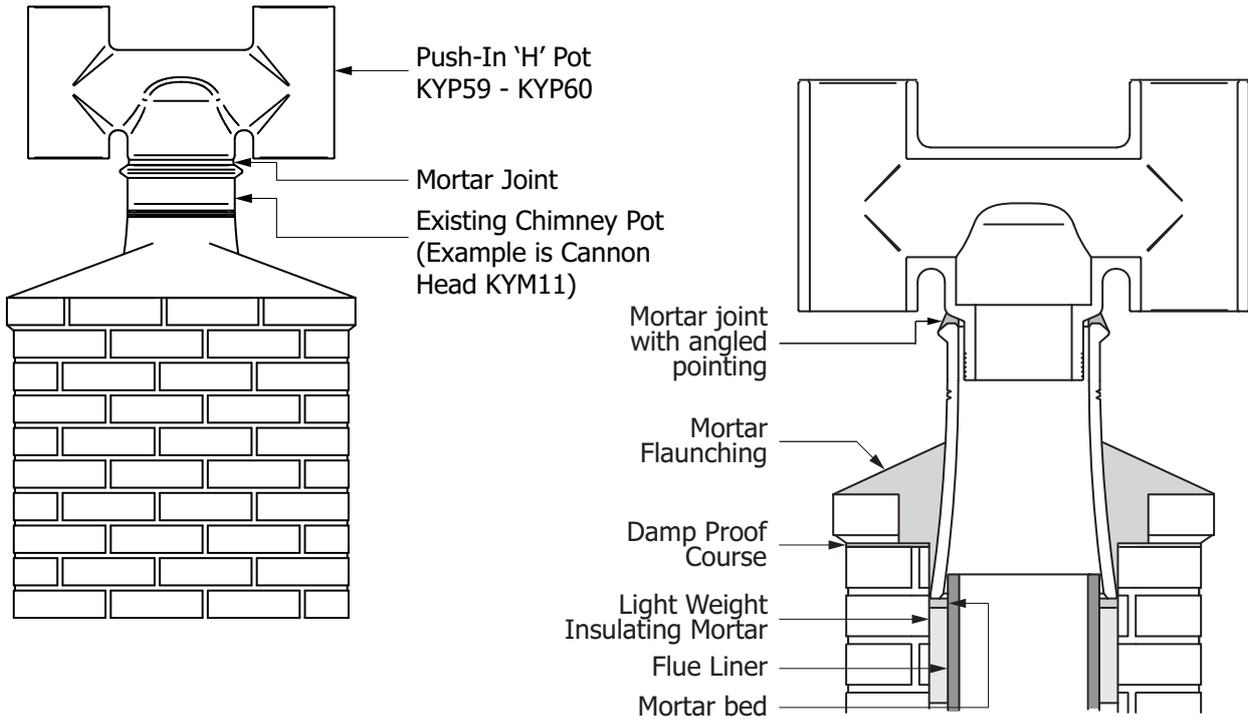

Instructions

These instructions are for the fitting of a push-in 'H' pot into an existing pot.

The sketch shows the push-in 'H' pot fitted to an existing pot as a typical example. If a new pot is being installed with an 'H' pot, refer to the separate fitting instructions for the particular pot.

Inspect the existing chimney pot and the new 'H' pot and confirm they are undamaged. Ensure the 'H' pot is suitable for use with the existing chimney pot, flue system and the type of fire installed.



Established 1906

WT KNOWLES & SONS LIMITED

Fitting Instructions

Push-In 'H' Pot

Code No: KYP59 - KYP60

W T Knowles & Sons Limited

Ash Grove Pipe Works

Elland

West Yorkshire

HX5 9JA

www.wtknowles.co.uk

September 2016: Issue 1

Instructions

For red terracotta chimney pots, mix the mortar with a red coloured dye. Apply a bead of mortar around the top face rim of the chimney pot and fit the 'H' pot in place. Align it with the chimney stack and if possible to suit the normal prevailing wind direction as shown in the sketch and ensure it is vertical and firmly positioned.

Any exposed mortar at the joint should be smoothed and angled downwards to allow rain to run away.

Use a smoke test to check for leakage and to ensure that the insert is working correctly. Close the appliance and warm the chimney flue with a blowlamp or similar heating device for approximately ten minutes. Put smoke pellets in the appliance firebox (or bottom of the chimney or the appliance recess) and light. Close the appliance when smoke has formed and allow the smoke to make its way up the chimney.

After the installation, the flue, chimney 'H' pot should be warmed through gradually to prevent cracking and the drying out of mortar between the 'H' pot and the chimney pot. This must be done before initial use (on first firing) or after long periods without use.

We would recommend that chimneys using the following fuels are regularly cleaned and inspected as follows:

Smokeless Fuels -	at least once annually
Coal -	twice per year
Wood -	quarterly
Oil -	annually
Gas -	annually

It is essential for safety reasons that any insert to be fitted is correctly selected and is suitable for the heating appliance being used.